

LAYER NEEDED:

APPROVED FOR WET

INSTALLS LIKE SHOWERS

UP TO 105°C, BEATS

TOP BRANDS

MEMBRANES:

RESTRICTIONS


NO BRAND

TRANSPARENT MEMBRANE

FLARED STUDS GRIP

THINSET STRONGER



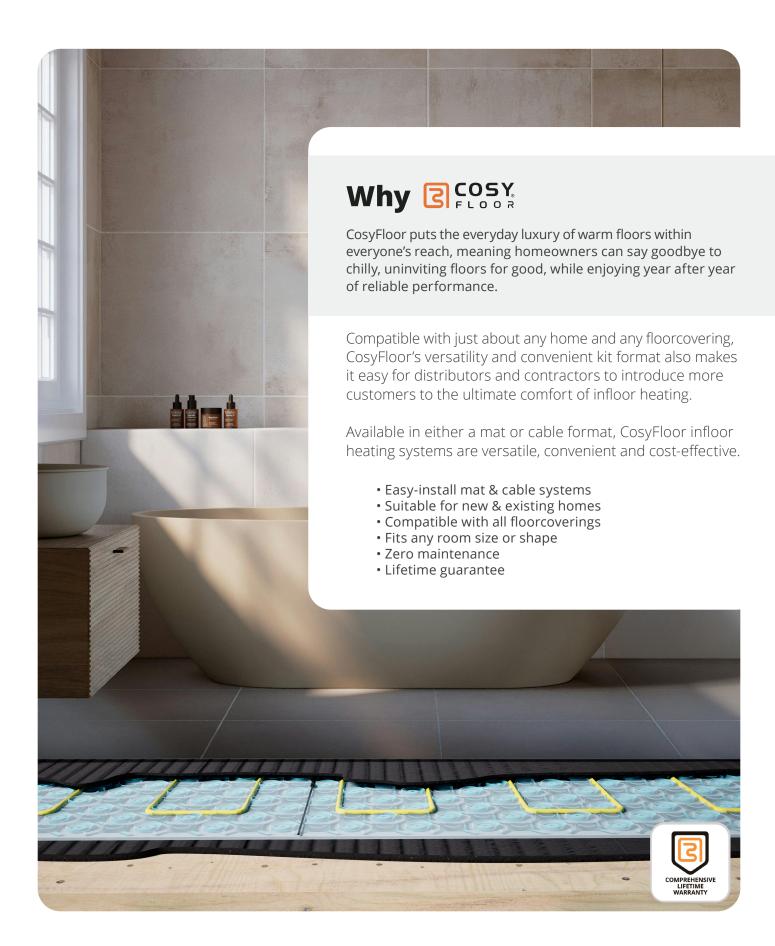



CosyFloor Content Guide

| WHY COSY FLOOR | 2 |
|---------------------------------------|----|
| CONTENT GUIDE | 3 |
| HEATING MAT SYSTEM | 4 |
| MEMBRANE + CABLE SYSTEM | 6 |
| COSYFLOOR THERMOSTATS | 8 |
| COSYFLOOR ACCESSORIES | 9 |
| POWER MODULES FOR HEATING LARGE AREAS | 10 |
| COMPREHENSIVE LIFETIME WARRANTY | 11 |





CosyFloor Heating Mat System

- One of the best infloor heating systems for a time saving installation.
- High quality lay-flat mesh provides ultimate ease of installation.
- Thinnest and most robust heating cable coupled with a lifetime warranty combine for complete peace of mind.
- Only 3/16th of an inch thick for integration into almost any room.
- Self-adheres to subfloor for fast, simple, easy installation.

The CosyFloor electric heating mat provides efficient underfloor heating with a low-profile, easy-to-install design. Pre-sized mats accelerate installation for multi-unit projects, while the fiberglass mesh and twin-conductor heating cable allow for small onsite adjustments. The thin 3/16" profile integrates smoothly with thinset or self-levelling cement, eliminating the need for additional adhesives.



Fast installation with pre-sized heating pads




Customizable mesh + cable design for flexible onsite layout



Low-profile build for seamless floor integration



ETL certified for safety and reliability

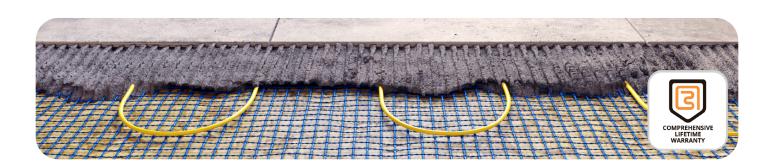

CosyFloor Cable Fastening Tape

Dual Voltage 15A Power Base

| HEATMAT | | | | | | | | |
|---|---|-------|----------------------|--|--|---|----------------|--|
| SQ FT COVERAGE | AMPS | WATTS | MAT SIZE (INCHES) | CABLE ONLY CODE | INC. PROGRAMABLE THERMOSTAT (T5267) CODE | INC. PROGRAMA THERMOSTAT (TS CODE | | |
| 110 VOLT COSYFLOOR CABLE SYSTEM (includes heating mat, thermostat floor sensor, circuit fault detector) | | | | | | | | |
| 10 | 1.0 | 106 | 73 X 20 | C1010 | C1010S | C1010ST | C1010STW | |
| 15 | 1.6 | 176 | 110 X 20 | C1015 | C1015S | C1015ST | C1015STW | |
| 20 | 2.1 | 230 | 146 X 20 | C1020 | C1020S | C1020ST | C1020STW | |
| 25 | 2.5 | 275 | 183 X 20 | C1025 | C1025S | C1025ST | C1025STW | |
| 30 | 3.1 | 340 | 220 X 20 | C1030 | C1030S | C1030ST | C1030STW | |
| 35 | 3.8 | 420 | 256 X 20 | C1035 | C1035S | C1035ST | C1035STW | |
| 40 | 5.1 | 560 | 293 X 20 | C1040 | C1040S | C1040ST | C1040STW | |
| 50 | 5.5 | 610 | 366 X 20 | C1050 | C1050S | C1050ST | C1050STW | |
| 60 | 7.3 | 800 | 439 X 20 | C1060 | C1060S | C1060ST | C1060STW | |
| 70 | 7.5 | 820 | 512 X 20 | C1070 | C1070S | C1070ST | C1070STW | |
| 80 | 7.9 | 870 | 585 X 20 | C1080 | C1080S | C1080ST | C1080STW | |
| 90 | 8.5 | 940 | 659 X 20 | C1090 | C1090S | C1090ST | C1090STW | |
| 100 | 10.7 | 1180 | 732 X 20 | C1100 | C1100S | C1100ST | C1100STW | |
| 110 | 9.8 | 1080 | 805 X 20 | C1110 | C1110S | C1110ST | C1110STW | |
| | | • | | | | | | |
| | | (in | | OLT COSYFLO thermostat floor se | OR MAT ensor, circuit fault detecto | r) | | |
| 10 | 0.4 | 98 | 73 X 20 | C2010 | C2010S | C2010ST | C2010STW | |
| 15 | 0.8 | 180 | 110 X 20 | C2015 | C2015S | C2015ST | C2015STW | |
| 20 | 1.0 | 210 | 146 X 20 | C2020 | C2020S | C2020ST | C2020STW | |
| 25 | 1.3 | 290 | 183 X 20 | C2025 | C2025S | C2025ST | C2025STW | |
| 30 | 1.6 | 350 | 220 X 20 | C2030 | C2030S | C2030ST | C2030STW | |
| 35 | 1.9 | 415 | 256 X 20 | C2035 | C2035S | C2035ST | C2035STW | |
| 40 | 2.1 | 460 | 293 X 20 | C2040 | C2040S | C2040ST | C2040STW | |
| 50 | 2.5 | 550 | 366 X 20 | C2050 | C2050S | C2050ST | C2050STW | |
| 60 | 3.1 | 680 | 439 X 20 | C2060 | C2060S | C2060ST | C2060STW | |
| 80 | 5.1 | 1120 | 585 X 20 | C2080 | C2080S | C2080ST | C2080STW | |
| 100 | 5.5 | 1200 | 732 X 20 | C2100 | C2100S | C2100ST | C2100STW | |
| 120 | 7.3 | 1600 | 878 X 20 | C2120 | C2120S | C2120ST | C2120STW | |
| 140 | 7.5 | 1650 | 1025 X 20 | C2140 | C2140S | C2140ST | C2140STW | |
| 160 | 7.9 | 1740 | 1171 X 20 | C2160 | C2160S | C2160ST | C2160STW | |
| 180 | 8.5 | 1870 | 1317 X 20 | C2180 | C2180S | C2180ST | C2180STW | |
| 220 | 9.8 | 2150 | 1610 X 20 | C2220 | C2220S | C2220ST | C2220STW | |
| | | | CONT | ROLS & ACCE | SSORIES | | | |
| Thermostat Fl | oor Sensor | | 20111 | 11023 471662 | SSORIES | | T5262 | |
| | Thermostat Floor Sensor 15A Dual Voltage Programmable Thermostat | | | | | | T5267 | |
| 15A Programmable Touchscreen Thermostat | | | | | | | T5268 | |
| | 15A Programmable Touchscreen Thermostat With WiFi | | | | | | | |
| Heating Cable Repair Kit | | | | | | | T5269 T5271 | |
| | cuit Fault Detecto | or | | | | | T5273 | |
| 25' Connectio | 25' Connection Cable (inc. connection kit) | | | | | | | |
| | | | | | | | | |

T5279

T5304



CosyFloor

Membrane + Cable System



Installer-Friendly Translucent Membrane

Shows complete mortar contact, ensuring full coverage and speeding up installation



Superior Heat Transfer

Even heat dispersion and faster warm-up time



1 inch Cable Pucks

Reduces complexity in cable spacing and provides more flexibility in heating cable coverage



Formed Insulation for most Durable & Flexible Cable

Cables are easier to form to desired layout



Higher Rated Cables

For ultimate quality and longevity




Best Warranty

Longest most inclusive warranty



Pre-Sized Project Pads

Pre-sized mats available in common sizes for high volume project applications

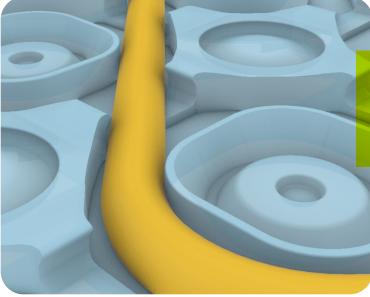



HEATING CABLES | COVERAGE TABLE

SQ FT COVERAGE (based on cable spacing & watts/sq.ft.):

| 2" 18W/FT | 3" 12W/FT | 4" 9W/FT | AMPS | WATTS | CABLE LENGTH (FEET) | CABLE ONLY CODE | INC. PROGRAMABLE THERMOSTAT (T5267) CODE | INC. PROGRAMABLE THERMOSTAT (T5268) CODE | INC. PROGRAMABLE THERMOSTAT (T5269) CODE |
|---------------------|---|--------------------|------|-------|---------------------------|--------------------|--|--|--|
| | 110 VOLT COSYFLOOR CABLE SYSTEM (includes heating cable, thermostat heat sensor & circuit fault detector) | | | | | | | | |
| 7 | 10 | 13 | 1.0 | 106 | 42 | C3010 | C3010S | C3010ST | C3010STW |
| 10 | 15 | 20 | 1.6 | 176 | 63 | C3015 | C3015S | C3015ST | C3015STW |
| 13 | 20 | 27 | 2.1 | 230 | 84 | C3020 | C3020S | C3020ST | C3020STW |
| 17 | 25 | 33 | 2.5 | 275 | 105 | C3025 | C3025S | C3025ST | C3025STW |
| 20 | 30 | 40 | 3.1 | 340 | 126 | C3030 | C3030S | C3030ST | C3030STW |
| 23 | 35 | 47 | 3.8 | 420 | 148 | C3035 | C3035S | C3035ST | C3035STW |
| 27 | 40 | 53 | 5.1 | 560 | 169 | C3040 | C3040S | C3040ST | C3040STW |
| 33 | 50 | 67 | 5.5 | 610 | 210 | C3050 | C3050S | C3050ST | C3050STW |
| 40 | 60 | 80 | 7.3 | 800 | 253 | C3060 | C3060S | C3060ST | C3060STW |
| 53 | 70 | 93 | 7.5 | 820 | 295 | C3070 | C3070S | C3070ST | C3070STW |
| 47 | 90 | 107 | 7.9 | 870 | 336 | C3080 | C3080S | C3080ST | C3080STW |
| 60 | 80 | 120 | 8.5 | 940 | 377 | C3090 | C3090S | C3090ST | C3090STW |
| 67 | 100 | 133 | 10.7 | 1180 | 421 | C3100 | C3100S | C3100ST | C3100STW |
| 73 | 110 | 147 | 9.8 | 1080 | 459 | C3110 | C3110S | C3110ST | C3110STW |

| 220 VOLT COSYFLOOR CABLE SYSTEM (includes heating cable, thermostat floor sensor, circuit fault detector & fastening tape) | | | | | | | | | |
|--|-----|-----|-----|------|-----|-------|--------|---------|----------|
| 7 | 10 | 13 | 0.4 | 98 | 42 | C4010 | C4010S | C4010ST | C4010STW |
| 13 | 20 | 27 | 1.0 | 210 | 84 | C4020 | C4020S | C4020ST | C4020STW |
| 20 | 30 | 40 | 1.6 | 350 | 127 | C4030 | C4030S | C4030ST | C4030STW |
| 27 | 40 | 53 | 2.1 | 460 | 168 | C4040 | C4040S | C4040ST | C4040STW |
| 33 | 50 | 67 | 2.5 | 550 | 209 | C4050 | C4050S | C4050ST | C4050STW |
| 40 | 60 | 80 | 3.1 | 680 | 251 | C4060 | C4060S | C4060ST | C4060STW |
| 53 | 80 | 107 | 5.1 | 1120 | 338 | C4080 | C4080S | C4080ST | C4080STW |
| 67 | 100 | 133 | 5.5 | 1200 | 427 | C4100 | C4100S | C4100ST | C4100STW |
| 80 | 120 | 160 | 7.3 | 1600 | 506 | C4120 | C4120S | C4120ST | C4120STW |
| 93 | 140 | 187 | 7.5 | 1650 | 587 | C4140 | C4140S | C4140ST | C4140STW |
| 107 | 160 | 213 | 7.9 | 1740 | 671 | C4160 | C4160S | C4160ST | C4160STW |
| 120 | 180 | 240 | 8.5 | 1870 | 758 | C4180 | C4180S | C4180ST | C4180STW |
| 147 | 220 | 293 | 9.8 | 2150 | 923 | C4220 | C4220S | C4220ST | C4220STW |

| CONTROLS & ACCESSORIES | |
|---|-------|
| Thermostat Floor Sensor | T5262 |
| 15A Dual Voltage Programmable Thermostatft. Roll) | T5267 |
| 15A Programmable Touchscreen Thermostat | T5268 |
| 15A Programmable Touchscreen Thermostat With WiFi | T5269 |
| Heating Cable Repair Kit | T5271 |

| CONTROLS & ACCESSORIES | | | | | |
|---|----------|--|--|--|--|
| CosyFloor Circuit Fault Detector | T5273 | | | | |
| 25' Connection Cable (inc. connection kit)ft. Roll) | T5275-25 | | | | |
| CosyFloor Cable Fixing Strips (Pack of 20) | T5278 | | | | |
| CosyFloor Cable Fastening Tape | T5279 | | | | |
| Dual Voltage 15A Power Base | T5304 | | | | |

| MEMBRANE | |
|--|-------|
| 20"x40" CosyFloor Heating Cable Membrane (8sq.ft. Sheet) | U0008 |
| 40"x50" CosyFloor Heating Cable Membrane (16sq.ft. Roll) | U1161 |



CosyFloor Thermostats





T5267 | 15A Thermostat — **Programmable Thermostat**

- · 7 day programmable
- · Includes air & floor temperature sensors
- Dual voltage 120V + 240V
- Built-in GFCI protection
- Battery backup







T5268 | 15A Thermostat — **Touchscreen Thermostat**

- · Color display with Child Lock
- Touchscreen
- 7 day programmable
- · Includes air & floor temperature sensors
- Dual voltage 120V + 240V
- · Built-in GFCI protection
- Battery backup









T5269 | 15A Thermostat — **Touchscreen Thermostat with WiFi**

- Wifi enabled
- · Color touchscreen display with Child Lock
- 7 day programmable
- · Includes air & floor temperature sensors
- Dual voltage 120V + 240V
- · Built-in GFCI protection



T5304 | Power module — **Dual Voltage Power module**

Used in conjunction with our T5268 or T5269 thermostats for larger heated floor areas.

- Dual voltage 120V + 240V
- Built-in GFCI protection
- 2 year warranty
- Max load 15 amps





CosyFloor Accessories



THERMOSTAT HEAT SENSOR

- · Replacement floor sensor
- Used in conjunction with the thermostat to determine the floor temperature

T5262



WIRE REPAIR KIT

• Used to repair yellow heating cable in cases of damage

T5271



25' CONNECTION CABLE

• To extend cold connection cable in heated areas with remote thermostat locations

T5275-25



CIRCUIT FAULT DETECTOR

• Connect heating cable or mat to fault detector prior to floor installation, and an audible warning will sound if damage has occurred.

T5262



CABLE FIXING STRIPS

• For use when fixing Cosyfloor cable systems to any sub floor

Pack of 20

T5262





Power Modules for Heating Large Areas

The power module system is ideal for 110V and 220V applications where the area of heated floor exceeds certain square footages. The power module is used in conjunction with the T5268 touchscreen thermostat or the T5269 touchscreen thermostat with WiFi – it cannot be used with the T5267 programmable thermostat. Each power module is capable of controlling up to 150 sq ft (110V) or 300 sq ft (220V) of heated floor area.

Benefits Include:

- Precision temperature control of larger heated floor areas using one thermostat
- Zoning capabilities throughout larger heated floor areas
- 2 year warranty

110 VOLT PROJECTS EXCEEDING 150 SQ FT

When heating more than 150 sq ft of floor area using 110V power, you will need to add one or more power modules. In addition to a thermostat, add a power module (Code T5304) for every 150 Sq Ft or 14.9 amps of heated floor space.

150 Sq Ft - 14.9 amps

- 1 x 110 sq ft mat / cable
- 1 x 40 sq ft mat / cable
- 1 x T5268 OR T5269 thermostat

200 Sq Ft - 18.3 amps

- 1 x 110 sq ft mat / cable
- 1 x 90 sq ft mat / cable
- 1 x T5304 power module
- 1 x T5268 OR T5269 thermostat

500 Sq Ft - 46.5 amps

- 4 x 110 sq ft mat / cable
- 1 x 60 sq ft mat / cable
- 4 x T5304 power module
- 1 x T5268 OR T5269 thermostat

220 VOLT PROJECTS EXCEEDING 300 SQ FT

When heating more than 300 sq ft of floor area using 220V power, you will need to add one or more power modules. In addition to a thermostat, add a power module (Code T5304) for every 300 Sq Ft or 14.9 amps of heated floor space.

300 Sq Ft - 14.9 amps

- 1 x 220 sq ft mat / cable
- 1 x 80 sq ft mat / cable
- 1 x T5268 OR T5269 thermostat

400 Sq Ft - 18.3 amps

- 1 x 220 sq ft mat / cable
- 1 x 180 sq ft mat / cable
- 1 x T5304 power module
- 1x T5268 OR T5269 thermostat

900 Sq Ft - 44.7 amps

- 3 x 220 sq ft mat / cable
- 3 x 80 sq ft mat / cable
- 2 x T5304 power module
- 1 x T5268 OR T5269 thermostat





Comprehensive Lifetime Warranty



- · Complete peace of mind covering all materials and labour for your full flooring project
- 100% coverage no depreciated cost methods
- Lifetime, for the original homeowner

As infloor heating specialists with 20 years of experience manufacturing and supplying infloor heating systems across North America, we know the importance of our warranty commitment to the lives of our installers and end-users.

All thermostats carry a 3 year warranty.

This warranty applies for all infloor heating systems installed after January 1, 2025.

Comprehensive Lifetime Warranty Summary of Terms

Cosyfloor Systems Inc. warrants that its Infloor Heating Cables will be free from manufacturing defects for the lifetime of the original purchaser in the property in which the heating system is installed. In case of failure, CosyFloor with repair or replace entire floor covering installation in part or in whole as necessary to restore infloor heating system to working condition.

Cosyfloor Systems Inc. warrants that its Infloor Heating Thermostats will be free from manufacturing defects for a period of 3 years from the date of installation.

Conditions of Coverage:

- · Installation is completed according to installation guidelines and recommendations of CosyFloor
- · Installation is completed in accordance with applicable local and national building codes and regulations
- · Complete warranty registration is filed within 30 days of installation at https://cosyfloor.ca/warranties/
- · Warranty Claims must be made within 30days of date of failure
- · Original proof of purchase is required to claim warranty

Exclusions from Coverage:

- · Commercial installations
- $\cdot \ \text{Installations where CosyFloor infloor heating system appears to have been altered from original specification.}$
- · Installations where CosyFloor infloor heating system appears to have been damaged or repaired following installation.

Limitations of Coverage:

- $\boldsymbol{\cdot}$ Applicable for installations within the United States & Canada
- Includes removal and re-installation of necessary flooring materials not extending beneath the original subfloor and above the finished floor (eg; walls, tub surrounds toilets) OR provide compensation equal to the cost of the original floor installation but not exceeding 100sq.ft. and \$40/sq.ft.
- $\cdot \text{ In instances where original finish materials are no longer available, CosyFloor cannot guarantee an exact match of original finish material}\\$
- Purchasers are expected to hold 10% overage of floor finish materials in case of repairs
- Thermostats must be installed within 6 months from purchase date otherwise warranty period shall commence from purchase date and continue for 3.5 years
- Associated travel costs to complete work in rural locations



Step Into Warmth

T: (306) 757-8941 **E:** info@cosyfloor.ca

Head Office Regina, SK Canada USA
Distribution Centre
Salt Lake City, UT

Canada Distribution Centre Toronto, ON